

# **G** **E** series

## SINGLE CYLINDER

GE715 Ø - GE716 Ø - GE615 Ø - GE616 Ø - GE516 Ø



# SINGLE CYLINDER


GE715 0 - GE716 0 - GE615 0 - GE616 0 - GE516 0

**NEW ELECTRONICS**  
9" high resolution  
touch screen display.  
New user friendly  
interface. Ethernet,  
WiFi, NFC connections.  
Bluetooth is also  
available for future  
developments

**KNITTING HEAD**  
designed to knit high quality  
items and ensure constant  
reliability over time

**SINKERS CAP**  
high speed for higher  
production



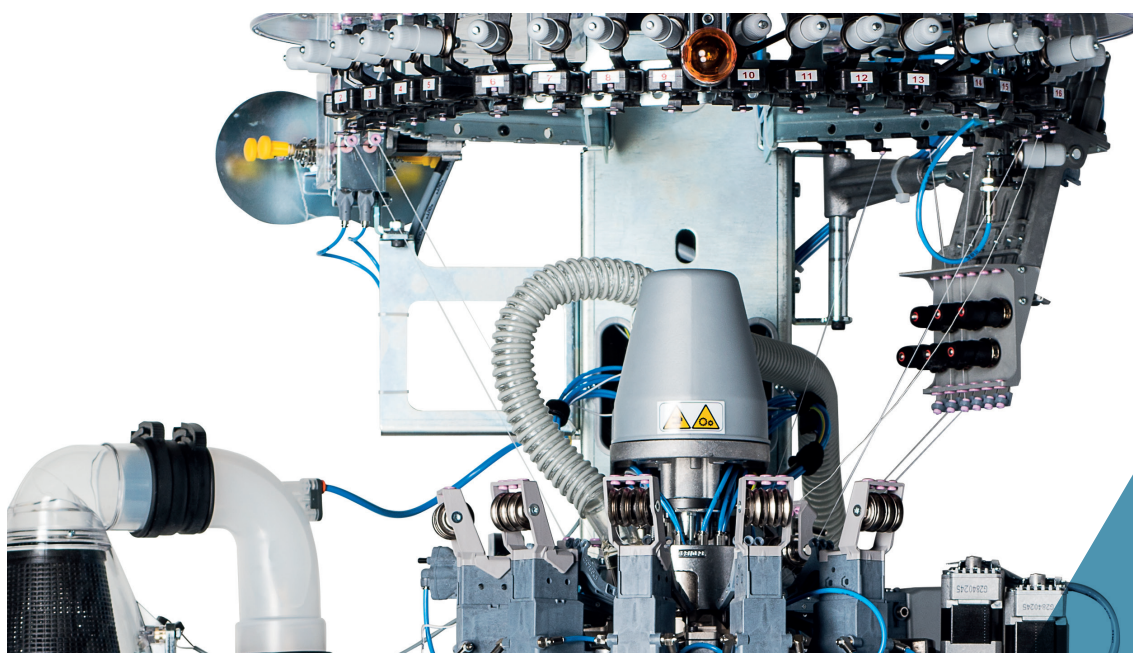

All images in this brochure are indicative and not binding.


## SINGLE CYLINDER

GE715 0 - GE716 0 - GE615 0 - GE616 0 - GE516 0

1 feed machines are the best sellers of the single cylinder for men's socks series as, thanks to their versatility, they can produce several different items, from the very simple to the most complex, without compromising on quality and efficiency. Available in two versions, with five or six colors on course and in different diameters and numbers of needles. New electronics provides control and execution of all machine commands. Drawings and articles are created and managed by Digraph 3 Plus software package, which contains a full collection of styles the operator can combine in different ways to obtain the desired results.

- 5 or 6 colors pattern on course according to the model, plain knit
- Reciprocated heel and toe in different sizes and 3D effects
- 20 or 28 yarn fingers, according to the model
- Rising dial and finger plate with stepping motor (on GE516 0 - GE616 0 - GE716 0 only)
- Electronic actuators for needle selection, 8 or 9 according to the model
- Brushless coaxial main motor

### MACHINE DIMENSIONS



Length max 94.5 cm  
Depth max 103.3 cm  
Height max 180 cm

### MACHINE WEIGHT



ca. 230 Kg

# SINGLE CYLINDER

GE715 0 - GE716 0 - GE615 0 - GE616 0 - GE516 0

## TECHNICAL DATA

MODEL	CYLINDER DIAMETER	GAUGE	NEEDLE THICKNESS
GE715 0	3"1/2	6 1/2 to 20	0.85 - 0.70 - 0.60 mm
GE716 0	3"1/2	6 1/2 to 20	0.85 - 0.70 - 0.60 mm
GE615 0	3"3/4	from 7 to 20	0.85 - 0.70 - 0.60 mm
GE616 0	3"3/4	from 7 to 20	0.85 - 0.70 - 0.60 mm
GE516 0	4"	from 6 1/2 to 19	0.85 - 0.70 - 0.60 mm

Above data are indicative and not binding.

## STANDARD DEVICES

- Stepper motor electric dial with adjustable height (GE516 0 - GE616 0 - GE716 0 only)
- Stitch cam feed: 1 with 2 different heights.
- 9" high speed sinkers cap
- High resolution touch screen display
- Yarn sliding sensors guard cleaning device
- Heel yarn recover device with four positions
- 9 yarn fingers on stitch feed
- Yarn creel
- USB port
- 10 or 18 color yarnfingers, according to model
- Circular yarn cutter with mechanical stop
- 1 yarnfinger on laid-in elastic feed
- Stepper motor controlled adjustable suction valve

## MAIN OPTIONAL DEVICES

- LGL Eco Power or Eco Compact yarn storage feeder, also available with "Attivo" electronic brake version
- Dinema GRYF positive yarn feeders
- Elastic yarn positive feeders, for compression socks
- Dinema Plus elastane positive feeders
- Stitch cams on first feed with 3 different heights
- Motorized stitch cams
- Motorized sinkers cap for sinkers pressure
- Motorized sinkers cap for sinkers pressure and angular position
- Antitwist device
- Footlet device
- Elastane extra tweezers device
- Yarn recover device, 6 positions
- Yarn trimming circular cutter with adjustable speed
- Led inspection lamps
- 3 yarnfingers color group (on GE615 0 - GE715 0 only)
- Preparation for storage feeder "Unifeeder 2" by BTSR
- Ethernet board for connection to Dinema Nautilus data collector system
- Second elastic yarnfinger
- Yarn sliding control sensors, Dinema ISPY
- Pneumatic yarn tensioner for covered elastane
- Suction fan

## POSSIBLE KNITTING

The standard machine can perform the following knittings

- 5 or 6 colors pattern, according to model, plus ground color, mesh, tuck and float stitch
- With laid-in elastic: 5 or 6 colors pattern, according to model, plus ground color, tuck and float stitch
- With laid-in elastic: 4 or 5 colors pattern, according to model, plus ground color, mesh, tuck and float stitch

# SINGLE CYLINDER

GE715 Ø - GE716 Ø - GE615 Ø - GE616 Ø - GE516 Ø



## NUMBER OF COLORS

Number of colors	GE715 Ø - GE615 Ø 5 on course plus ground GE716 Ø - GE616 Ø - GE516 Ø 6 on course plus ground
------------------	--

## PERFORMANCES

KNITTING FEATURES	3" 1/2 3" 3/4 4" CYLINDERS
	Patterns or selections 300 rpm
	Plain knit without pattern 350 rpm
MAXIMUM SPEED	350 rpm

DISCLAIMER: maximum speed may vary depending on yarn, knitting, lubrication etc

## GAUGE

	GAUGE																											
Model	ø	6½	7	7½	8	8½	9	9½	10	10½	11	11½	12	12½	13	13½	14	14½	15	15½	16	16½	17	17½	18	18½	19	20
GE615 Ø	3"3/4		84	88	96		108	112	116	120 128	132		144		156	160	168		176	180	188	192	200			216 220		240
		Needle thickness 0.85 mm																										
		Needle thickness 0.70 mm																		Needle thickness 0.60 mm								
GE715 Ø	3"1/2	72		84	88	96	100		108 112	116	120	128	132		144		156		168			180		192	200			220
		Needle thickness 0.85 mm																										
		Needle thickness 0.70 mm																				Needle thickness 0.60 mm						

	GAUGE																												
Model	ø	6½	7	7½	8	8½	9	9½	10	10½	11	11½	12	12½	13	13½	14	14½	15	15½	16	16½	17	17½	18	18½	19	20	
GE516 Ø	4"	84	88	96		108 112		116 120		128 132	136	144		156 160		168	176	180	188	192	200		216	220			240		
		Needle thickness 1.00 mm																											
		Needle thickness 0.85 mm																											
		Needle thickness 0.70 mm																		Needle thickness 0.60 mm									
GE616 Ø	3"3/4		84	88	96		108	112	116	120 128	132		144		156	160	168		176	180	188	192	200			216 220		240	
		Spessore ago 0.85 mm																											
		Needle thickness 0.70 mm																		Needle thickness 0.60 mm									
GE716 Ø	3"1/2	72		84	88	96	100		108 112	116	120	128	132		144		156		168			180		192	200			220	
		Needle thickness 0.85 mm																											
		Needle thickness 0.70 mm																				Needle thickness 0.60 mm							

Above data are indicative and not binding.

### DISCLAIMER:

All features in the brochure are for information only and subject to change without any prior notice.

For a complete list of available options, please contact Lonati sales network.

The Company accepts no liability for improper use of machinery.

Lonati is recommending needles from  
**GROZ-BECKERT®**

# SINGLE CYLINDER

GE715 0 - GE716 0 - GE615 0 - GE616 0 - GE516 0

## NOISE LEVEL (Maximum noise output for GE series models)


Noise pressure level on reference surface = LPA 79,5 dB - Noise power level = LWA 96,6 dB - Peak= 109,3 dB

## LUBRICANTS

Average consumption for 100 dozens= 270 gr. Lonati recommends: Kluber Madol 183 Supreme - Fuchs Trax 16C - VICKERLUBE SOCK 46


## GREASE

For seals, bearings etc: Lonati recommends: TechnolubeSeals Damping grease Nyogel 774F-1

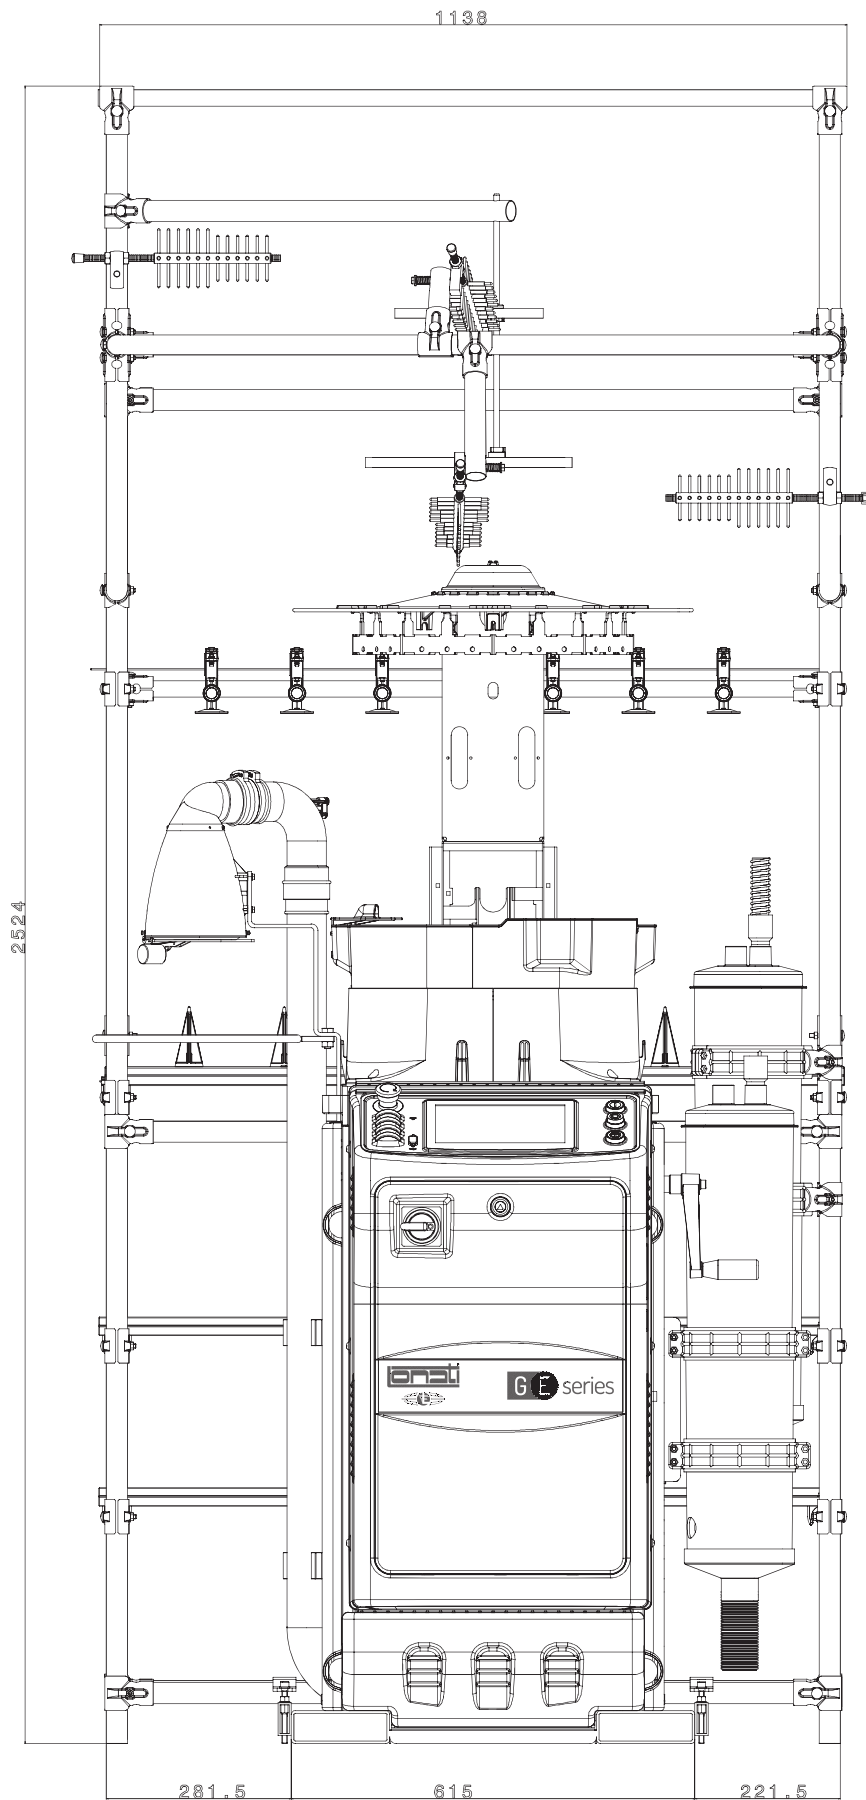

DESCRIZIONE	CODICE	NR. ROCHE	PESO KG.	NOTE
Porta rocche	G3930706	23	20	Versione standard
Porta rocche	G3930707	23	20	Versione con antistrappo by BTSR



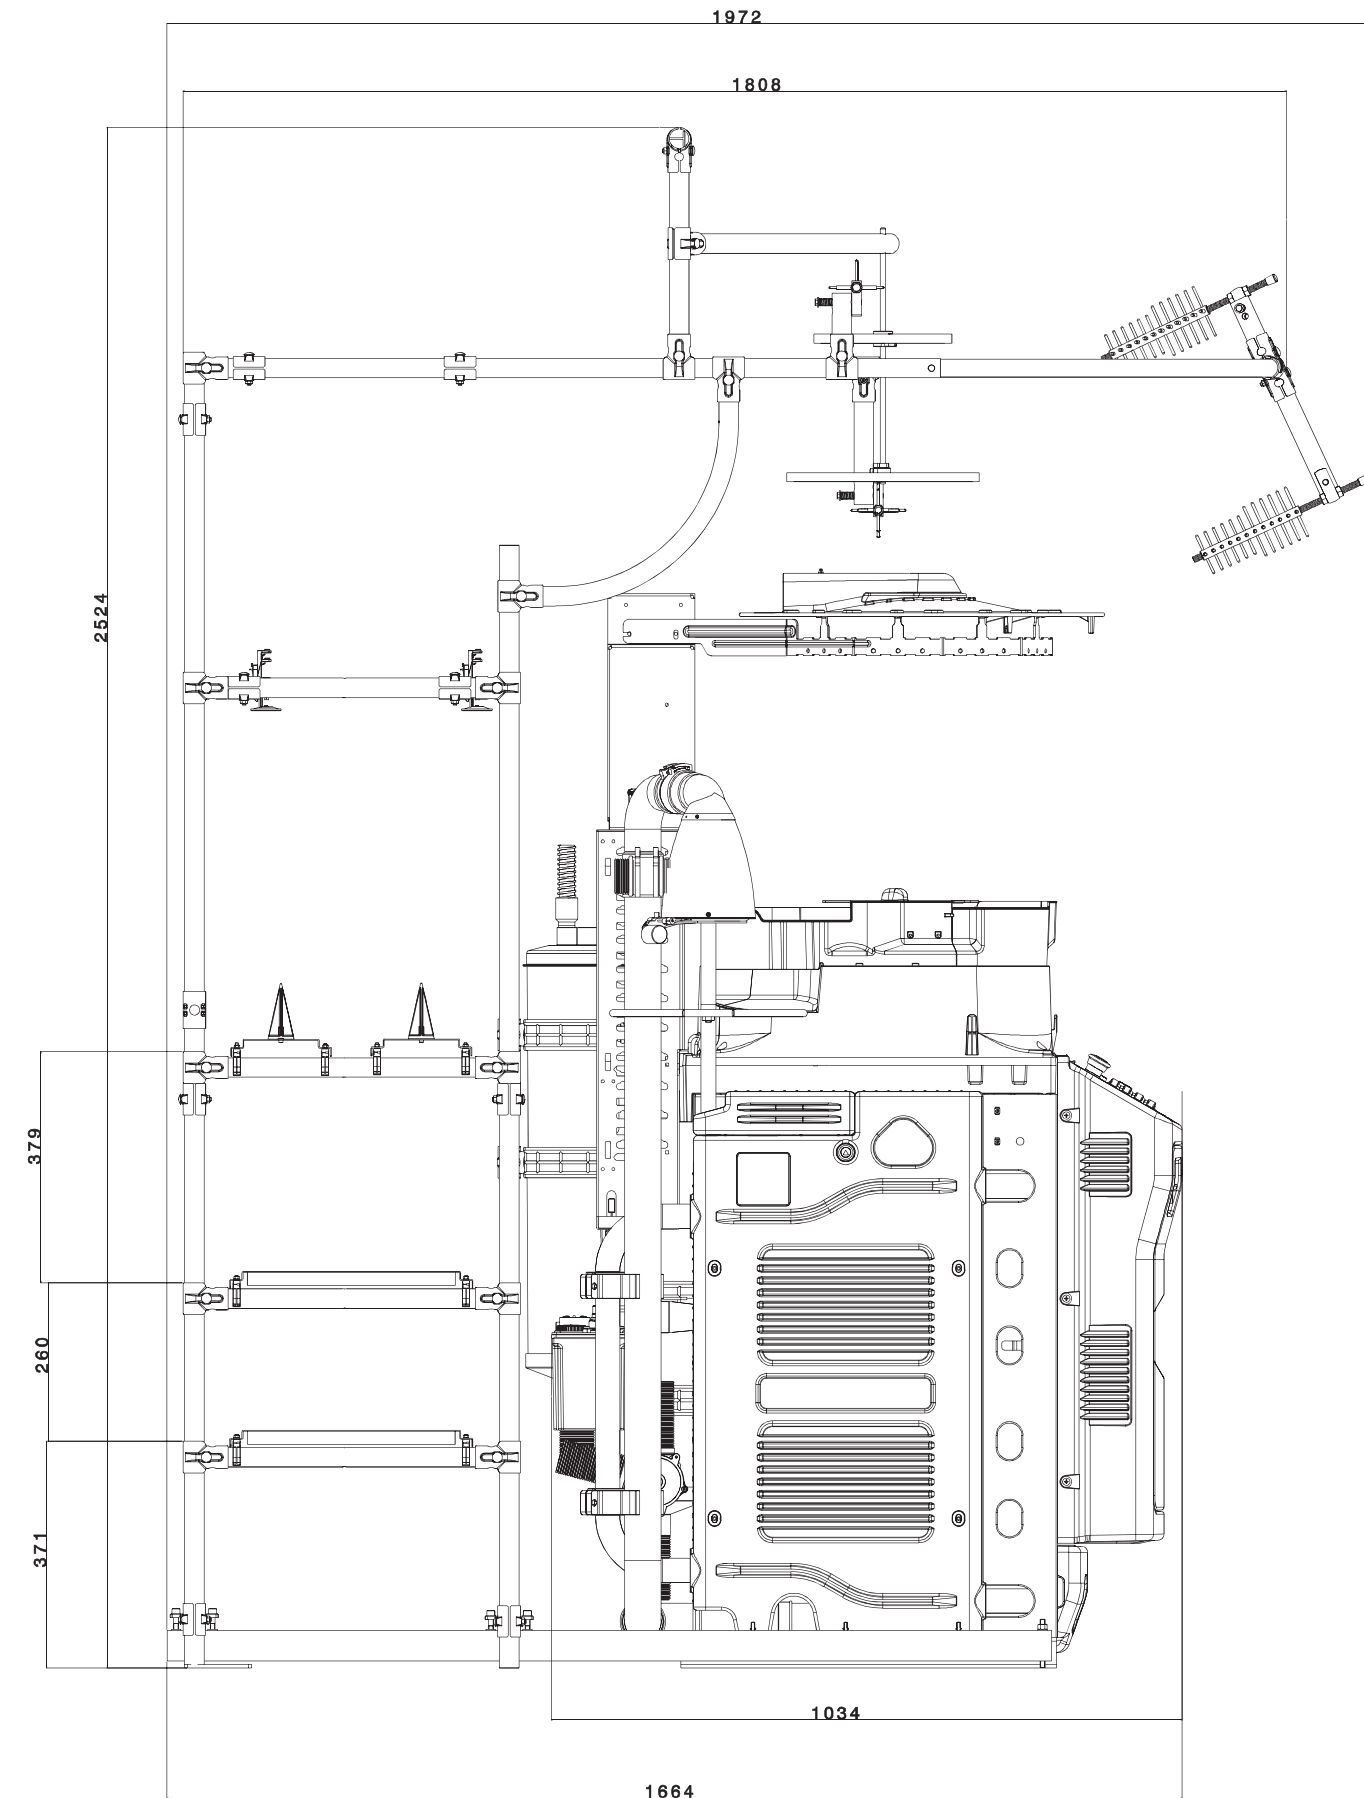

DESCRIZIONE	CODICE	NR. ROCCHIE	PESO KG.	NOTE
Porta rocche	G3930706	23	20	Versione standard
Porta rocche	G3930707	23	20	Versione con antistrappo by BTSR







**LONATI SPA**

Via Francesco Lonati, 3 | 25124 Brescia (Italy)  
Tel. +39 03023901 | Fax +39 030 2310024  
C.F.: 01469680175 | P.iva: 02096730961  
info@lonati.com - www.lonati.com