

GE series
SINGLE CYLINDER
GE523H



SINGLE CYLINDER


GE523H


SBYS DEVICE
for automatic linking,
increased reliability
and productivity
compared to the
previous series

KNITTING HEAD
designed to knit high quality
items and ensure constant
reliability over time

**STEPPING
MOTORS**
with absolute
encoder for
angular position
control

NEW ELECTRONIC
9" high resolution touch
screen display. New
user friendly interface.
Ethernet, WiFi, NFC
connections, Bluetooth is
also available for future
developments

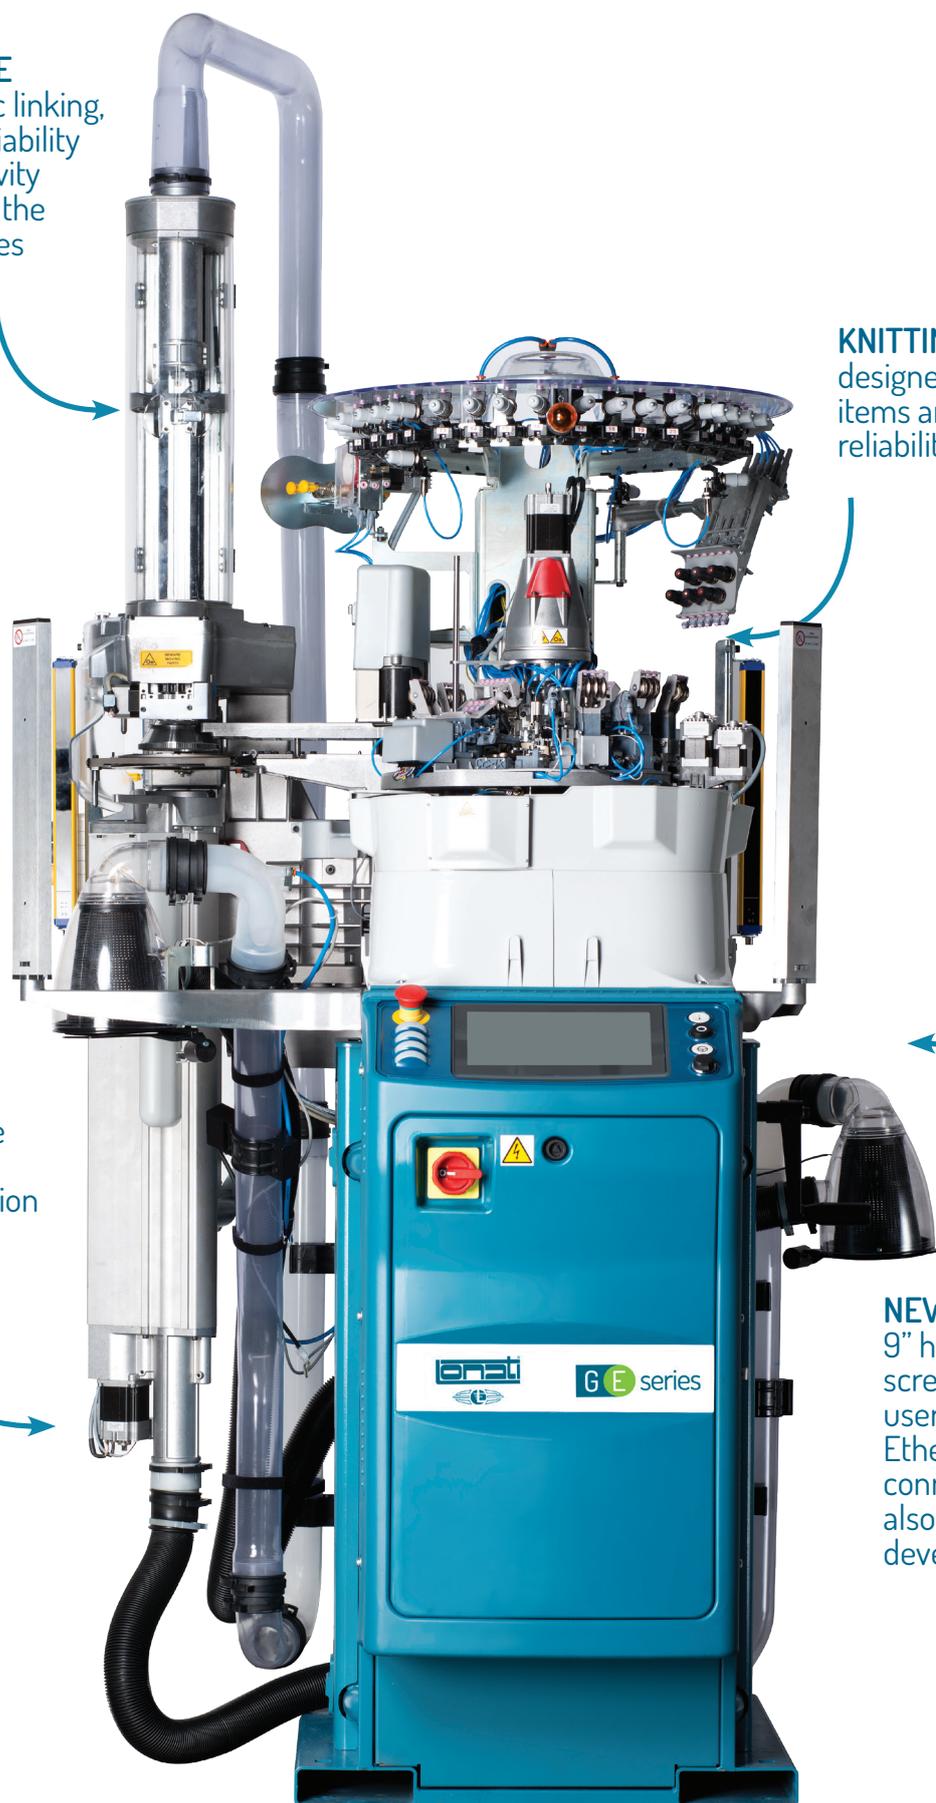

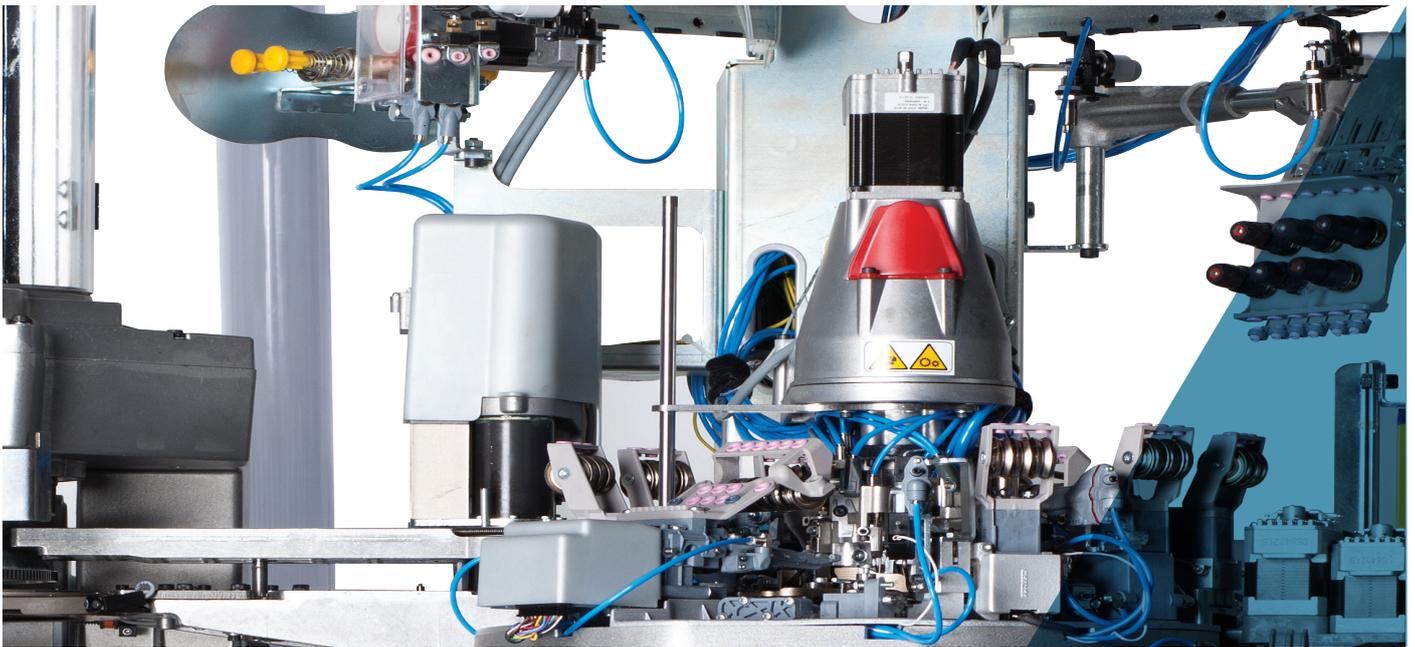

All images in this brochure are indicative and not binding.

SINGLE CYLINDER GE523H

A new machine for 2 feeds items with 3 colors pattern. Automatic linking with the latest version of the SBYS device, performing a “real linking” technique. Advantages are remarkable: superior quality sock finishing, more comfort and resistance compared to socks made using conventional systems. New electronics provides control and execution of all machine commands. Drawings and articles are created and managed by Digraph 3 Plus software package, which contains a full collection of styles the operator can combine in different ways to obtain the desired results.

- 3 colors pattern with 2 feeds, plain knit
- Reciprocated heel and toe in different sizes and 3D effects
- 36 yarn fingers
- Rising dial and finger plate with stepping motor
- 9 electronic actuators for needle selection
- Brushless coaxial main motor

MACHINE DIMENSIONS



Length max cm 127,3
Depth max cm 114,8
Height max cm 228

MACHINE WEIGHT



ca. 320 Kg

SINGLE CYLINDER

GE523H

TECHNICAL DATA

MODEL	CYLINDER DIAMETER	GAUGE	NEEDLE THICKNESS
GE523H	4"	from 8 1/2 to 19	0.85 - 0.70 - 0.60 mm

Above data are indicative and not binding.

STANDARD DEVICES

- Stepper motor electric dial with adjustable height
- Motorized stitch cams
- Motorized sinker cap for sinker pressure and angular position
- 9" high resolution touch screen display
- Yarn sliding sensors guard cleaning device
- Heel yarn recover device with four positions
- 16 color yarn fingers
- 2 stepper motor controlled adjustable suction valves
- 9 yarn fingers on both stitch feed
- Yarn creel
- USB port
- Circular yarn cutter with mechanical stop
- 2 yarn finger for laid-in elastic

MAIN OPTIONAL DEVICES

- LGL Eco Power or Eco Compact yarn storage feeder, also available with "Attivo" electronic brake version
- Dinema GRYF positive yarn feeders
- Elastic yarn positive feeders, for compression socks
- Dinema Plus elastane positive feeders
- Motorized raising stitch device for sock extraction
- Antitwist device
- Footlet device
- Inside-out sock ejection device
- Elastane extra pliers device, feed 1 and 2
- Recover yarn device, 6 positions
- Yarn trimming circular cutter with adjustable speed
- Lower sock-turning device with rotating tube
- Linking device and yarnfingers inspection led lamps
- Preparation for storage feeder "Unifeeder 2" by B TSR
- Ethernet board for connection to Dinema Nautilus data collector system
- Yarn sliding control sensors, Dinema ISPY
- Pneumatic yarn tensioner for covered elastane
- Suction fan

POSSIBLE KNITTING

The standard machine can perform the following knittings

- Mesh, tuck and float stitch, jacquard, 2 feeds, plain knit
- 3 colors pattern plus ground color, mesh, tuck and float stitch, jacquard, 2 feeds, plain knit
- 2 colors pattern plus ground color, mesh, tuck and float stitch, jacquard, 2 feeds, plain knit
- With laid-in elastic: 2 colors pattern plus ground color, tuck and float stitch, 2 feed, plain knit
- With laid-in elastic: 1 color pattern plus ground color, mesh, tuck and float stitch, 2 feeds, plain knit

SINGLE CYLINDER GE523H

NUMBER OF COLORS

Number of colors	3 colors on course plus ground color, two feeds
------------------	---

PERFORMANCES

		4" CYLINDERS
KNITTING FEATURES	Patterns or selections 300 rpm	
MAXIMUM SPEED	300 rpm	

Above data are indicative and not binding.

DISCLAIMER: maximum speed may vary depending on yarn, knitting, lubrication etc.

GAUGE

		GAUGE																											
Model	ø	6½	7	7½	8	8½	9	9½	10	10½	11	11½	12	12½	13	13½	14	14½	15	15½	16	16½	17	17½	18	18½	19	20	
GE523H	4"					108		116		128	136	144		156		168	176	180	188	192	200		216	220				240	
		Needle thickness 0.85 mm																											
		Needle thickness 0.70 mm						Needle thickness 0.70 mm						Needle thickness 0.60 mm															

Above data are indicative and not binding.

DISCLAIMER:

All features in the brochure are for information only and subject to change without any prior notice.

For a complete list of available options, please contact Lonati sales network.

The Company accepts no liability for improper use of machinery.

SINGLE CYLINDER

GE523H

NOISE LEVEL (Maximum noise output for GE series models)


Noise pressure level on reference surface = LPA 79,5 dB - Noise power level = LWA 96,6 dB - Peak= 109,3 dB

LUBRICANTS


Average consumption for 100 dozens= 270 gr. Lonati recommends: Kluber Madol 183 Supreme - Fuchs Trax 16C

GREASE

For seals, bearings etc: Lonati recommends: TechnolubeSeals Damping grease Nyogel 774F-1

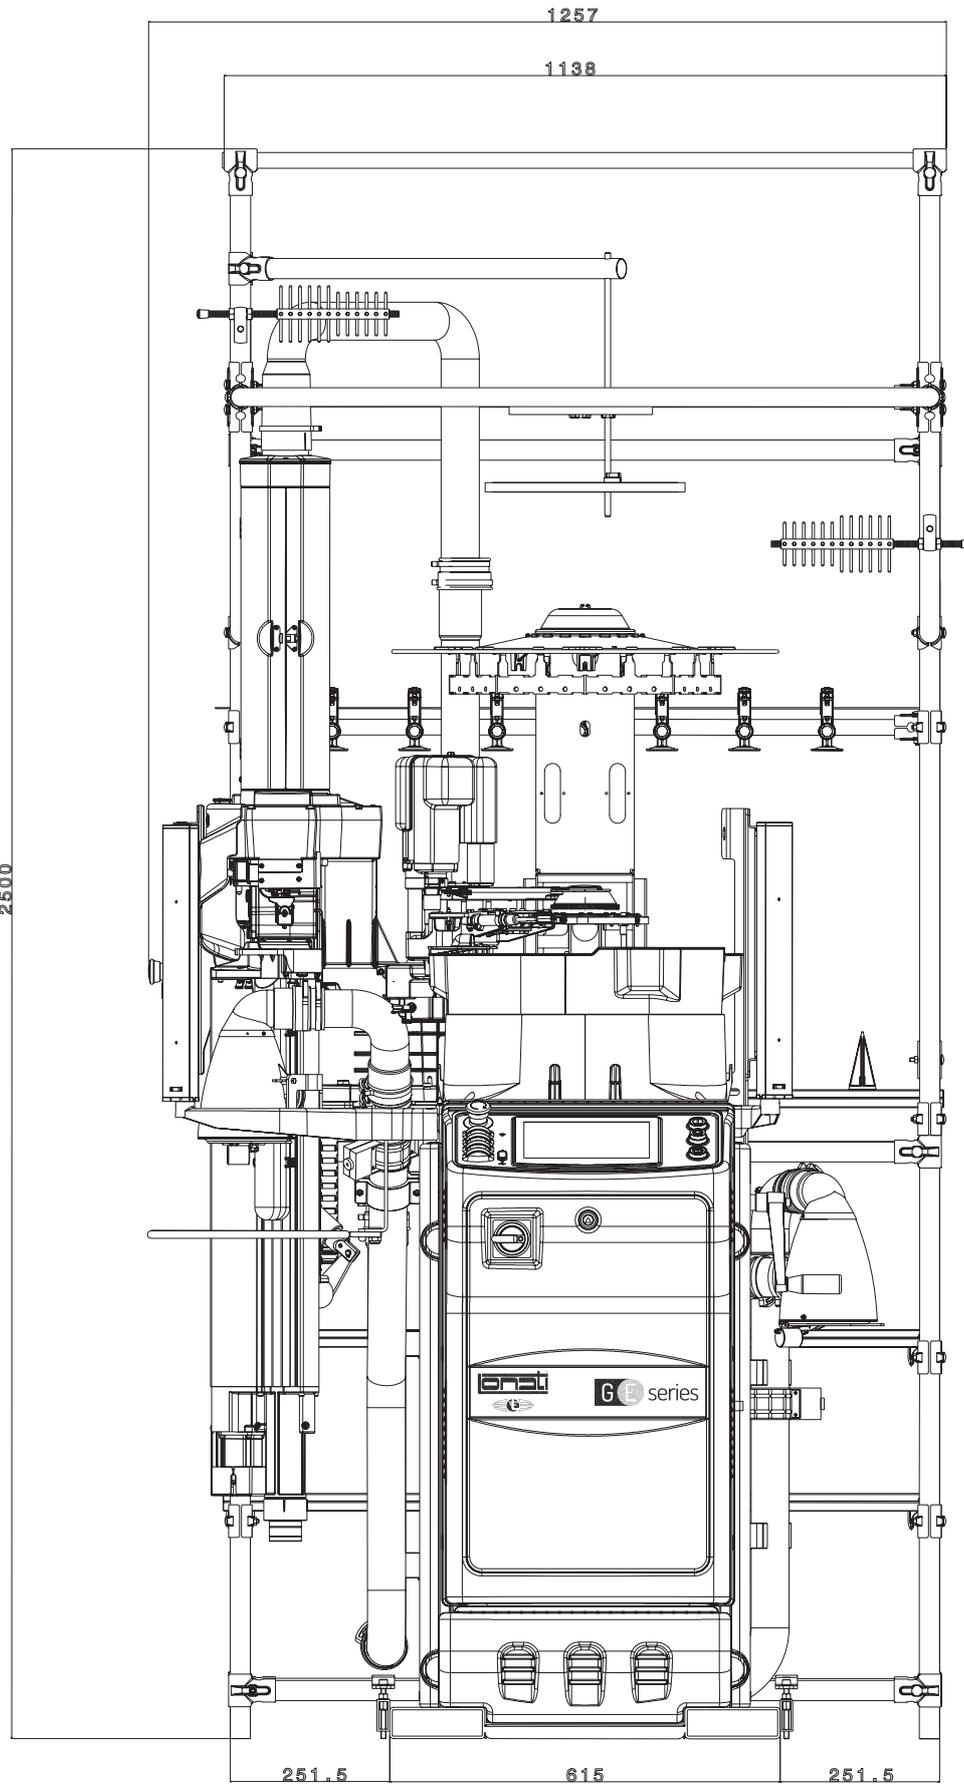

DESCRIPTION	CODE	NR. OF REELS	WEIGHT KG.	NOTES
Yarn creel	G3930706	23	51	Standard version
Yarn creel	G3930707	23	51	Version with BTSR sensors

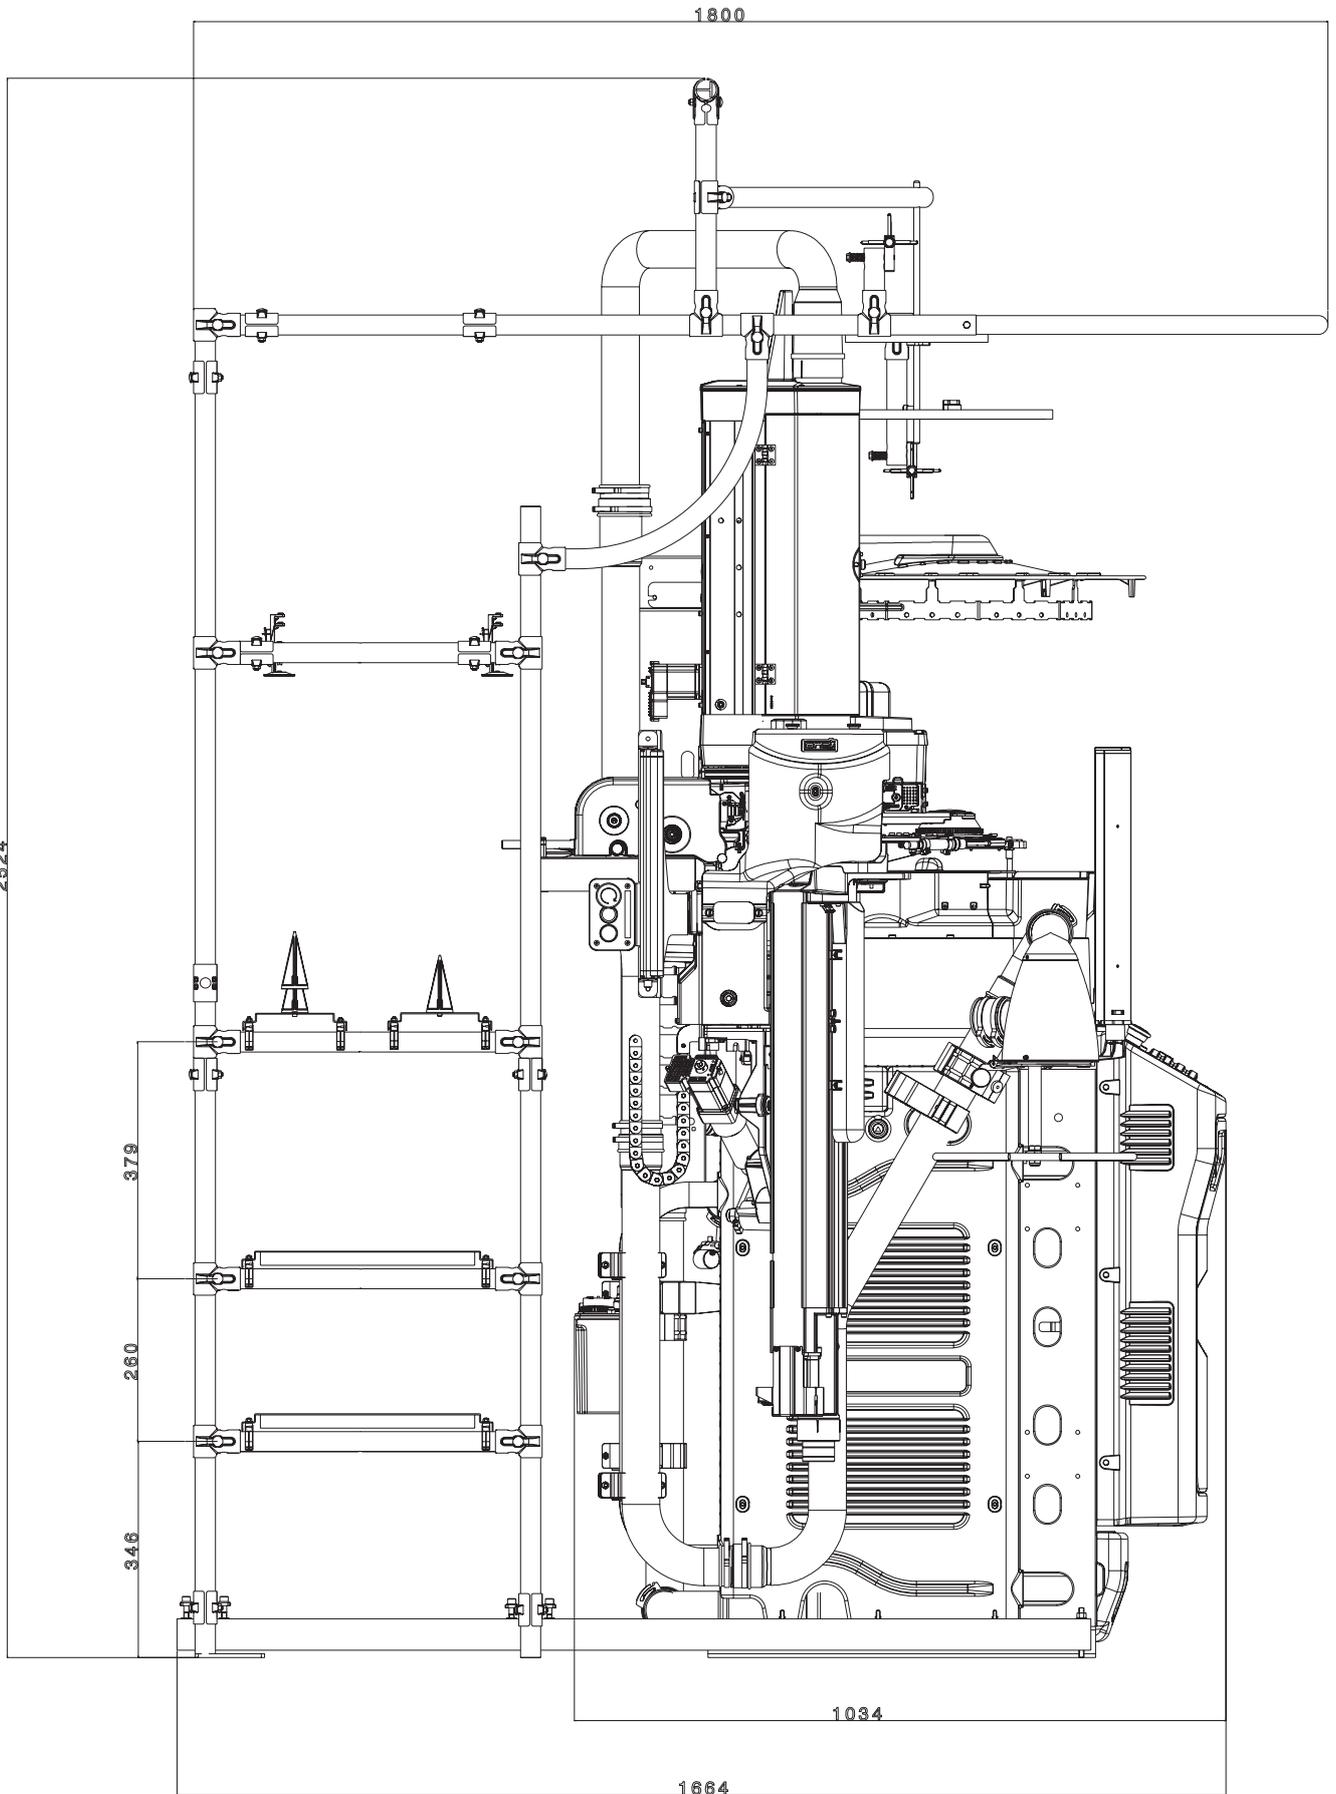

DESCRIPTION	CODE	NR. OF REELS	WEIGHT KG.	NOTES
Yarn creel	G3930706	23	51	Standard version
Yarn creel	G3930707	23	51	Version with BTSR sensors





LONATI SPA

Via Francesco Lonati, 3 | 25124 Brescia (Italy)
Tel. +39 03023901 | Fax +39 030 2310024
C.F.: 01469680175 | P.iva: 02096730961
info@lonati.com - www.lonati.com