

DC88X


DOUBLE CYLINDER

E133HX - E143HX - E153HX



DOUBLE CYLINDER

E133HX - E143HX - E153HX

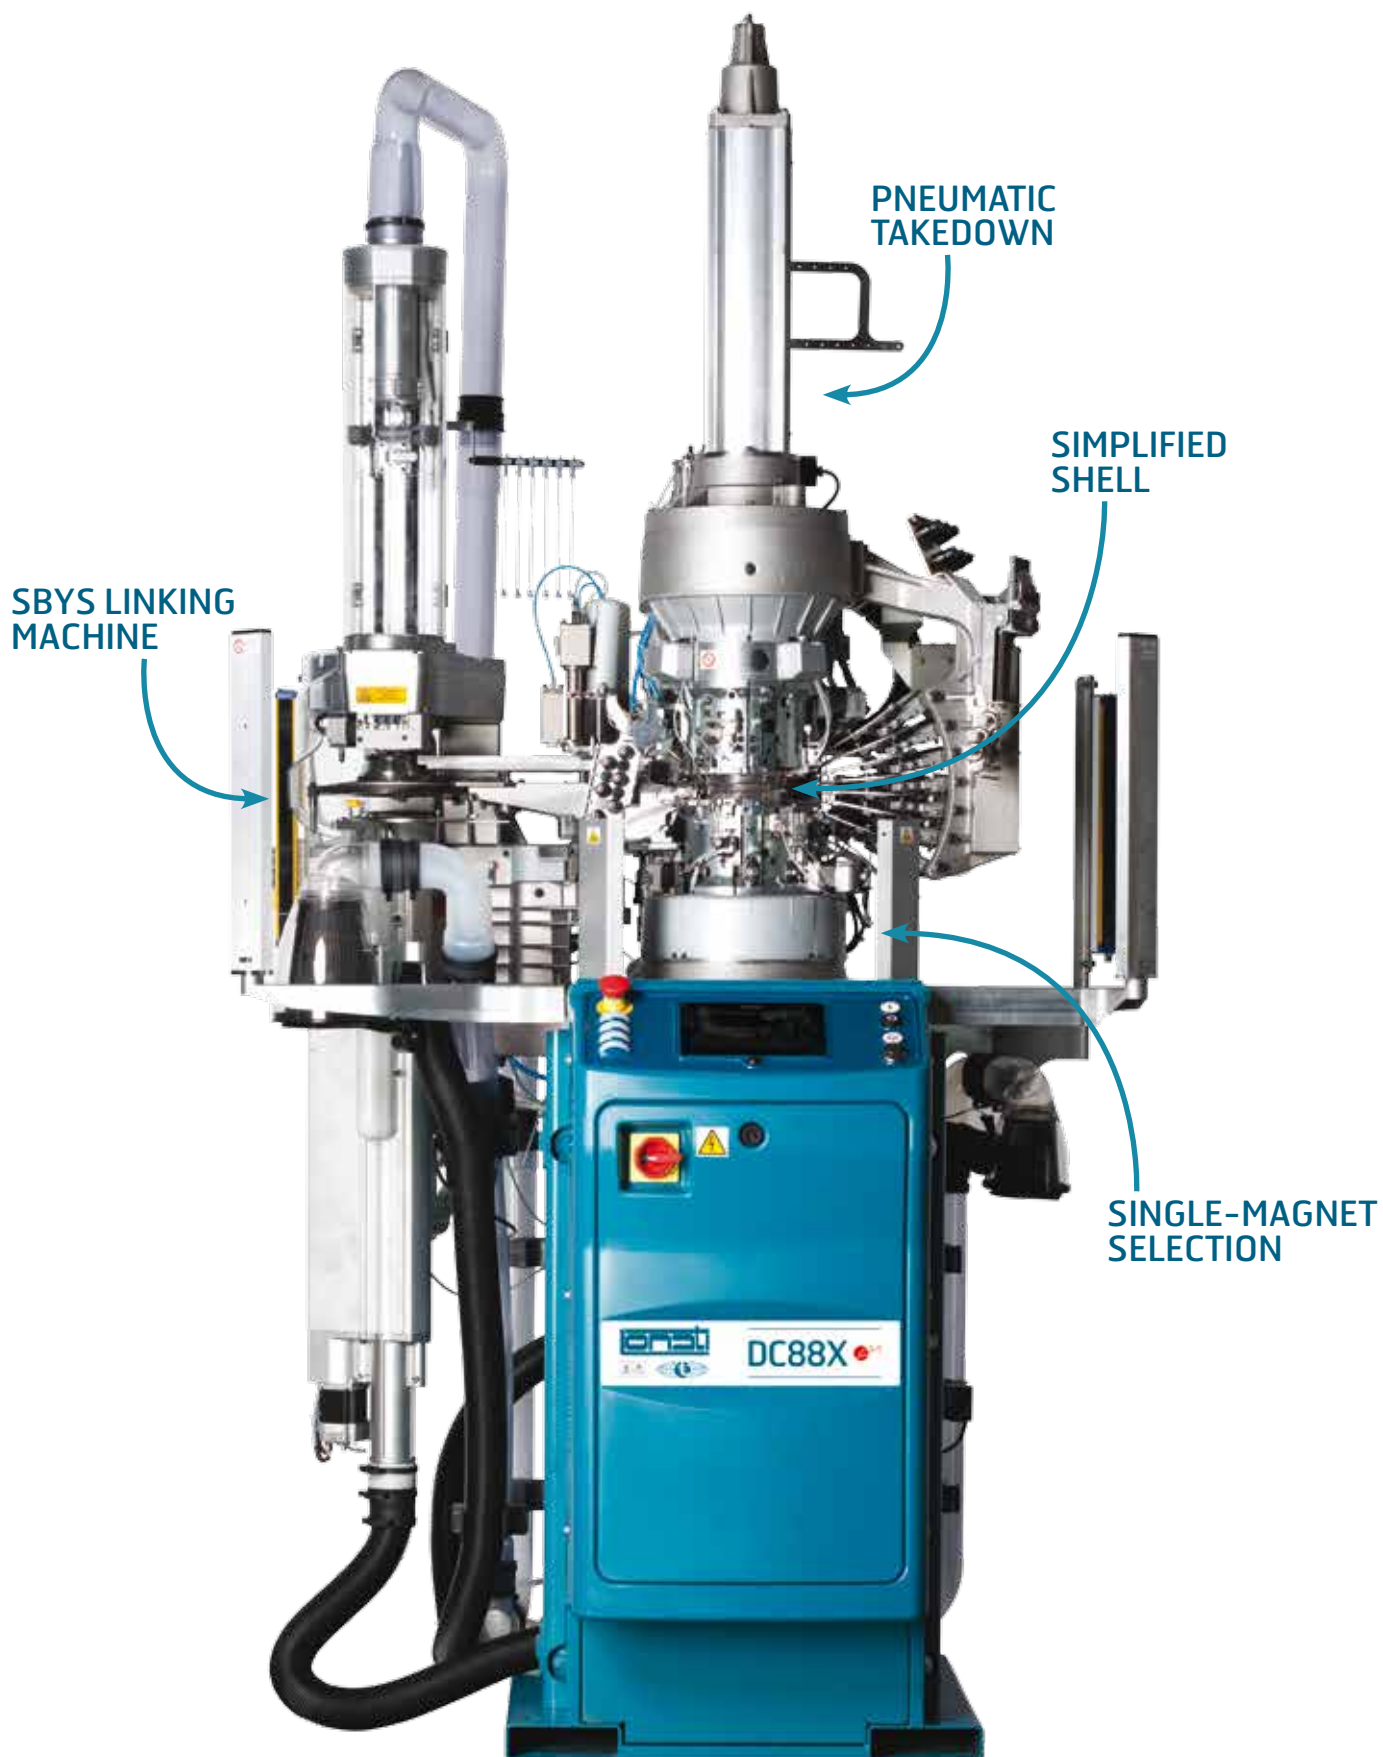



All images in this brochure are indicative and not binding.

DOUBLE CYLINDER E133HX - E143HX - E153HX

Double cylinder 2 feeds machine for the production of men's, women's and children's socks in ribs, plain knit, links and links jacquard. Tuck knitting option on first feed of lower cylinder. Brushless motor incorporated in the column with variable heel and toe reciprocating motion. 2 selection points instead of pickers and needle droppers. Electronic size control by automatic adjustment of the stitch. Available in 3" 1/2, 3" 3/4 and 4" diameters and gauge from 7 to 22. SbyS linking machine with different needle thickness according to machine gauge.

- Needle-needle single-magnet selection instead of pickers and needle droppers and links drums for different rib and links patterns.
- Simplified shell/skirt with less mobile cams used only in the closed toe procedure
- Takedown with electronic control and size self adjustment
- Stitch cams with independent stepper motors
- Easier sinkers maintenance thanks to the rotating knitting head
- Toe linking performed by SbyS linking machine

MACHINE DIMENSIONS



Length cm 116 + yarn creel cm 6
Depth cm 104 + yarn creel cm 69
Height cm 226 + yarn creel cm 34

MACHINE WEIGHT



Machine ca. 460 Kg
Yarn creel ca. 30 Kg

NOTE:

All data relating to outer appearance, performance, dimensions and weight are just as an indication.

DOUBLE CYLINDER

E133HX - E143HX - E153HX

TECHNICAL DATA

MODEL	CYLINDER DIAMETER	GAUGE	NEEDLE THICKNESS
E133HX	3"1/2	from 9 to 22	0.5 - 0.6 - 0.7 mm
E143HX	3"3/4	from 9 to 22	0.5 - 0.6 - 0.7 mm
E153HX	4"	from 7 to 22	0.5 - 0.6 - 0.7 - 0.9 mm

Above data are indicative and not binding.

STANDARD DEVICES

- Needle-needle single-magnet electronic selection system;
- Sock downtake with downwards movement control;
- Automatic turning device;
- Multi-stiffening by means of stepper motor;
- High heel by means of single-magnetic selection;
- Sinker cap with internal lubrication;
- 6 pneumatic yarnfingers;
- 4-rod take-up device;
- Suction valve controlled with stepper motor;
- Tail knitting at the start of the sock;

OPTIONAL DEVICES

- Fan
- Picot welt
- Size electronic control
- Split device
- Pneumatic yarnfinger number 7
- First yarnfinger positioning at feeds 5,6 and 7
- Second yarnfinger positioning at feeds 2,3 and 4
- Lycra plating
- Bare Lycra
- 6-rod take-up device
- Yarn brake discs opener 1 and 2
- Prearrangement for YoYo feeder
- Prearrangement for LGL feeder
- Spyder sensors
- Cassefiles mechanical sensors
- Knots electric sensors
- Ethernet board
- Patterned shadow stripe knit
- Open-work

SUITABLE YARNS

The machine is designed to be used with the following yarns:

- Natural fibers
- Syntetic yarn
- Elastic yarn

POSSIBLE KNITTING

The standard machine can perform the following knittings

- Plain knit
- Rib
- Links
- Links Jacquard
- Tuck stitch on first feed on lower cylinder

DOUBLE CYLINDER

E133HX - E143HX - E153HX

NUMBER OF COLORS

Number of colors

In jacquard 2 colors on the same course
Up to 6 colors on first feed
Up to 3 colors on second feed

PERFORMANCES

		4" CYLINDER DIAMETER
GAUGE		14 (needle thickness 0,7 mm)
KNITTING FEATURES		LINKS = 320 Rpm
		rib and plain mesh = 360 Rpm
		reciprocated motion = 340 Rpm
		tuck stitch = 260 Rpm
		Float stitch reciprocated motion 260 rpm
		Jacquard = 260 Rpm

Above data are indicative and not binding.

GAUGE

	GAUGE																
Model	ø	6	7	8	9	10	11	12	13	14	15	16	17	18	20	22	
133HX	3 1/2				96 100 104	108 112	116 120 124	128 132 136	140 144 148	152 156	160 164 168	172 176 180	184 188 192	196 200	216 220 224	240	
						Needle thickness 0.7											
						Needle thickness 0.6											
														Needle thickness 0.5			

	GAUGE																
Model	ø	6	7	8	9	10	11	12	13	14	15	16	17	18	20	22	
143HX	3"3/4				104 108	112 116 120	124 128 132	136 140 144	148 152 156	160 164 168	172 176 180	184 188 192	196 200 204	208 212 216	232 236 240		
						Needle thickness 0.7											
												Needle thickness 0.6					
														Needle thickness 0.5			

	GAUGE																
Model	ø	6	7	8	9	10	11	12	13	14	15	16	17	18	20	22	
153HX	4"	76 80	84 88 92	96 100 104	108 112 116	120 124 128	132 136 140 144	148 152 156	160 164 168	172 176 180	184 188 192	196 200 204	208 212 216	220 224 228 232	248 252 256		
		Needle thickness 0.9															
						Needle thickness 0.7											
												Needle thickness 0.6					
														Needle thickness 0.5			

Above data are indicative and not binding.

DISCLAIMER:

For gauges lower or higher than those in the chart, their maximum speed must be reduced by 10-15%. Should you use staple fiber, maximum speed has to be detected each time according to the yarn and the item to be produced. For jacquard and Links jacquard, maximum speed has to be detected each time according to the pattern.

DOUBLE CYLINDER

E133HX - E143HX - E153HX

ELECTRIC POWER CONSUMPTION

With program for medium length socks.

MACHINE MODEL	CONSUMPTION kWh
E133HX - E143HX - E153HX	0.51

COMPRESSED AIR CONSUMPTION

Gauge pressure 6,5 bar, humidity 0% and dryer outlet temperature 18°C-21°C.

MACHINE MODEL	CYCLE TIME	CONSUMPTION FOR STANDARD SOCK	CONSUMPTION FOR PANTYHOSE*	CONSUMPTION PER MINUTE FOR STANDARD SOCK	CONSUMPTION PER MINUTE FOR PANTYHOSE*
E133HX - E143HX - E153HX	3'13"	NI 120 - ft³ 4.2	NI 130 - ft³ 4.6	NI 37.3 - Cfm 1.3	NI 40.4 - Cfm 1.4

*Sock ejection blow open

SUCTION

Depression = Cylinder = 800 - 850 mm/H2O - **Flow**= 2.5 m³/min

NOISE LEVEL


Machine average noise level, suction included LpA=81.9 dB LwA=99 db

LUBRICANTS

Average consumption for 100 dozens= 330 gr. Lonati recommends: Kluber Madol 183 Supreme

GREASE

For seals, bearing etc Lonati recommends: Damping grease Nyogel 774F

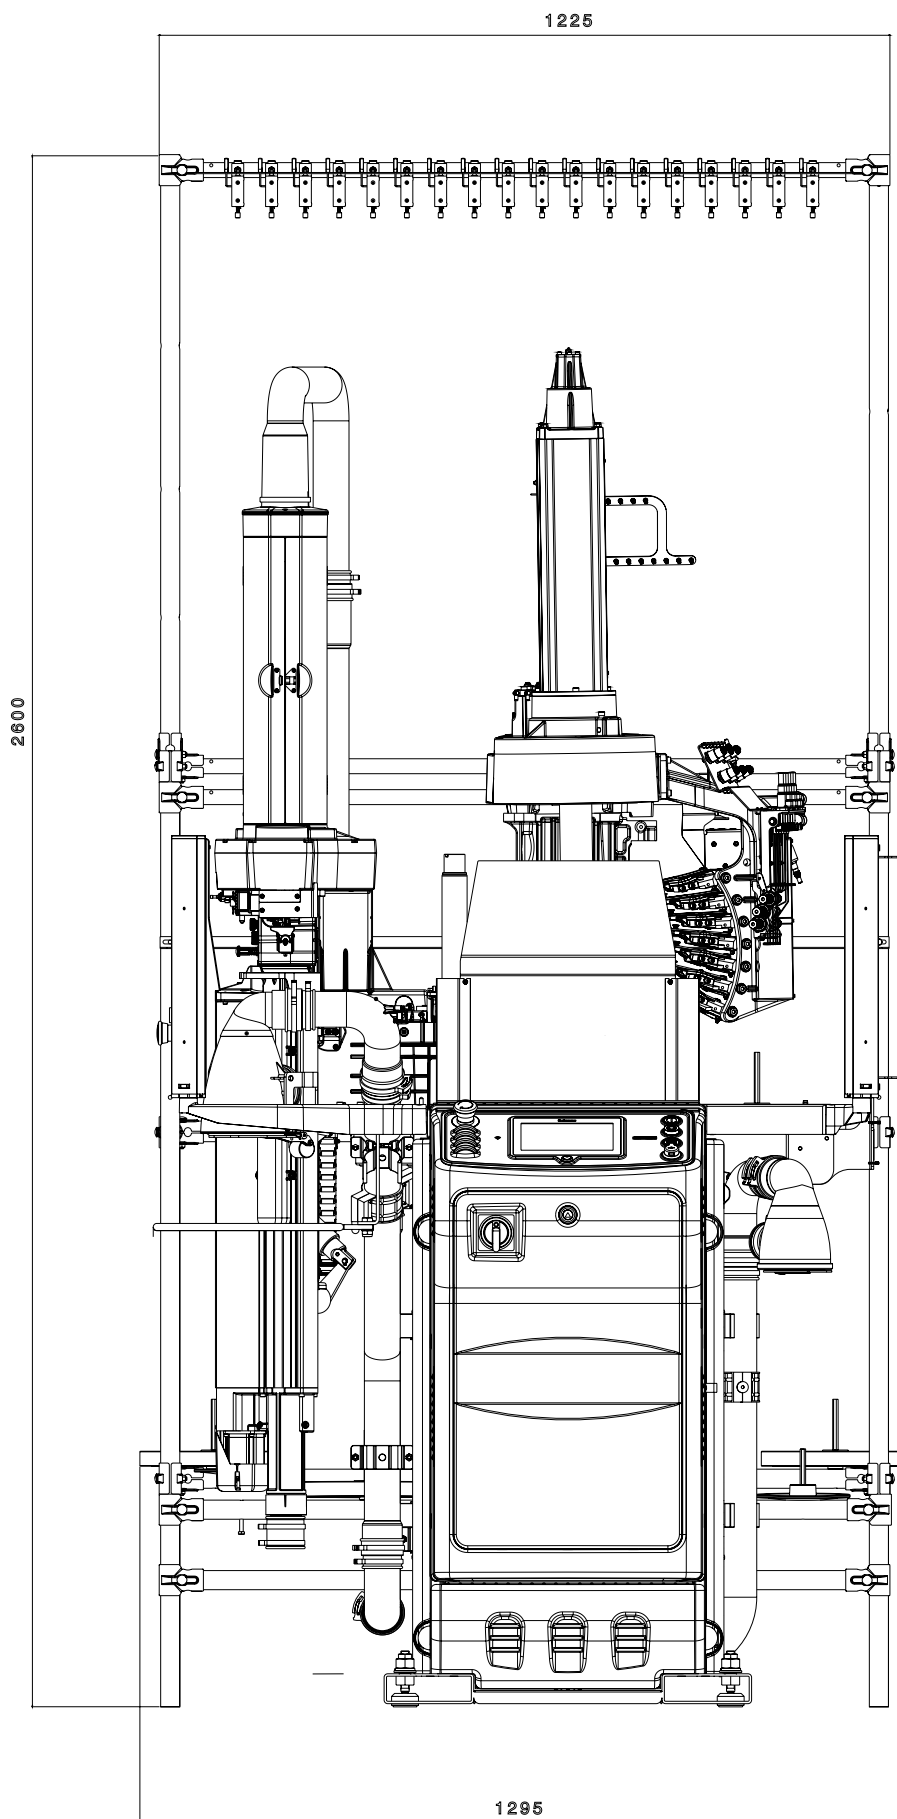


FRONT VIEW

Machine dimensions + 16 positions yarn creel.

NOTE:

The picture may show fittings and equipment that are supplied on demand and not.

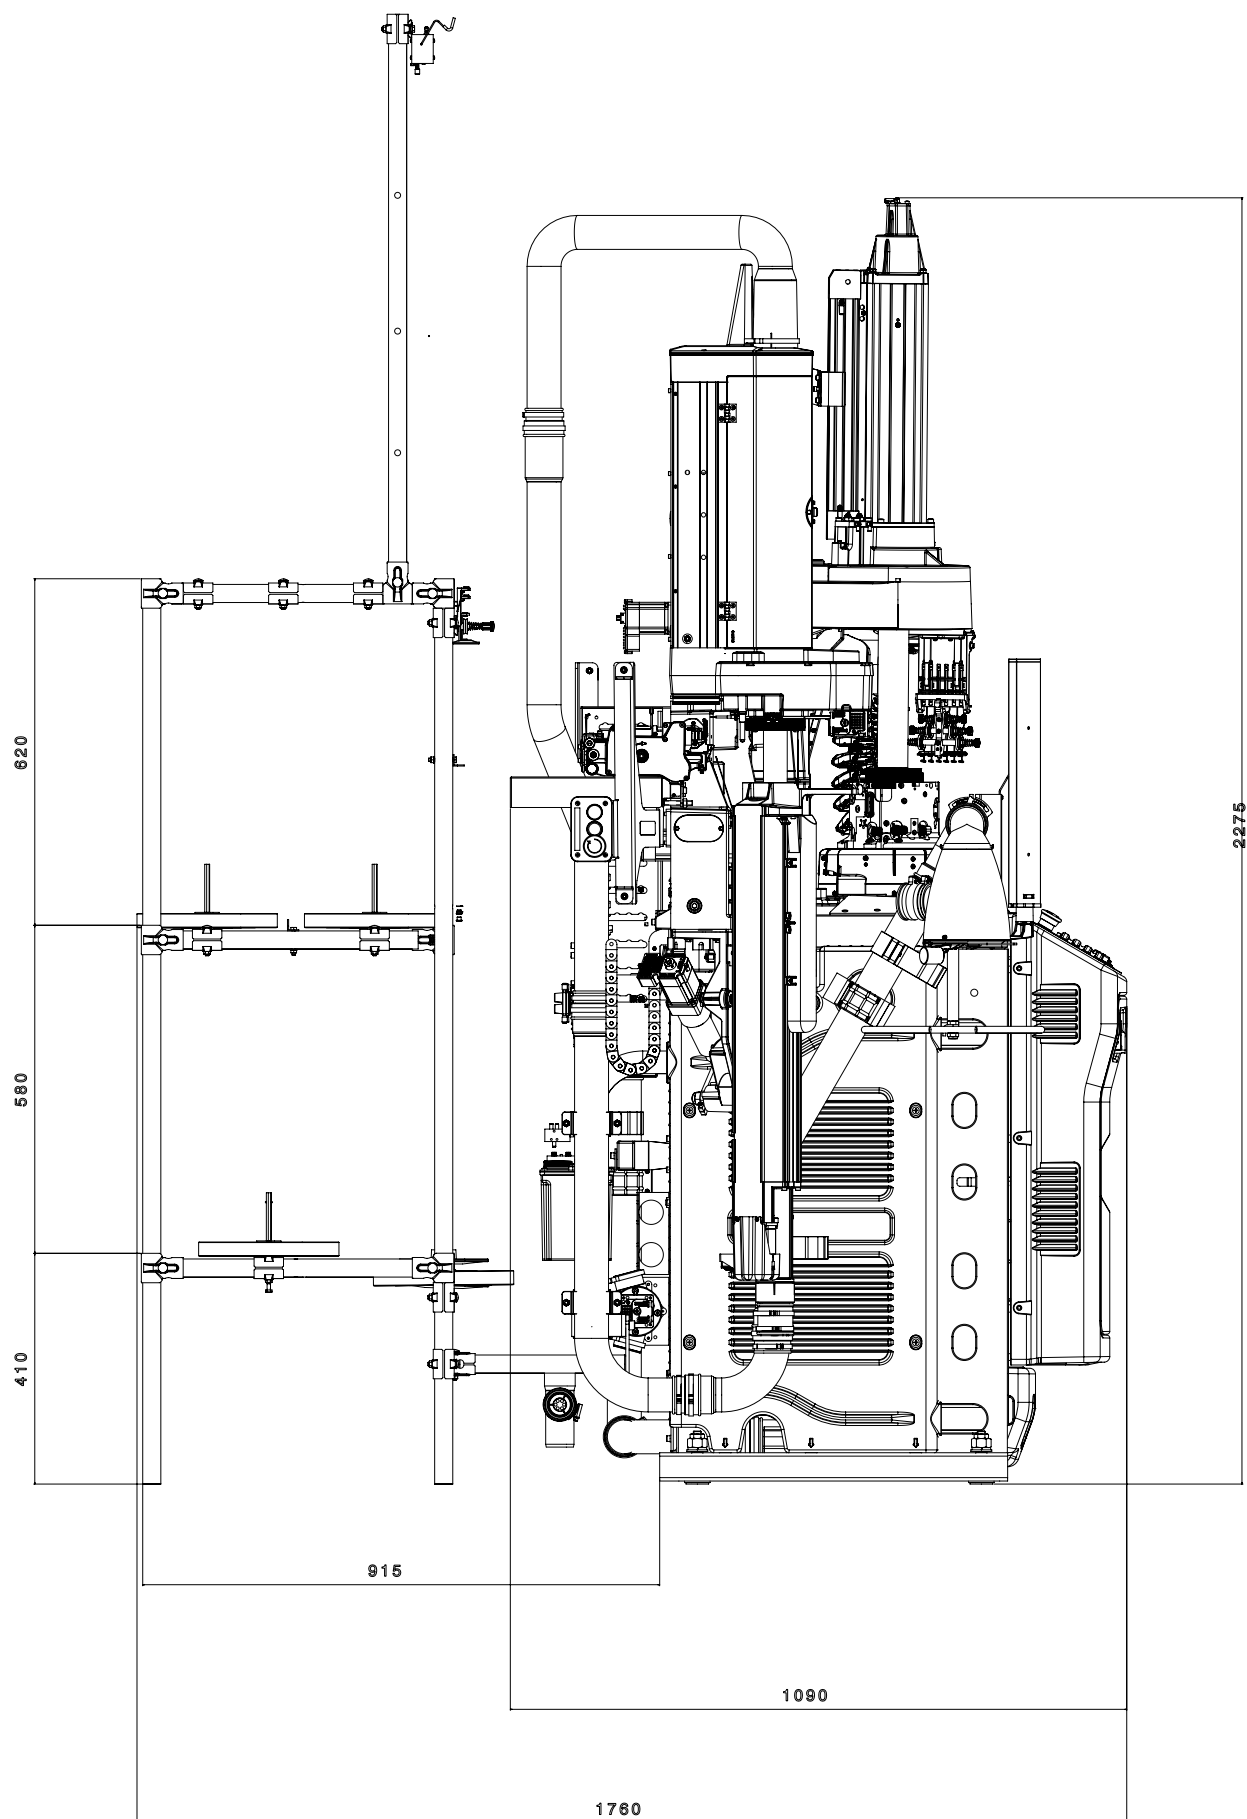


SIDE VIEW

Machine dimensions + 16 positions yarn creel.

NOTE:

The picture may show fittings and equipment that are supplied on demand and not.

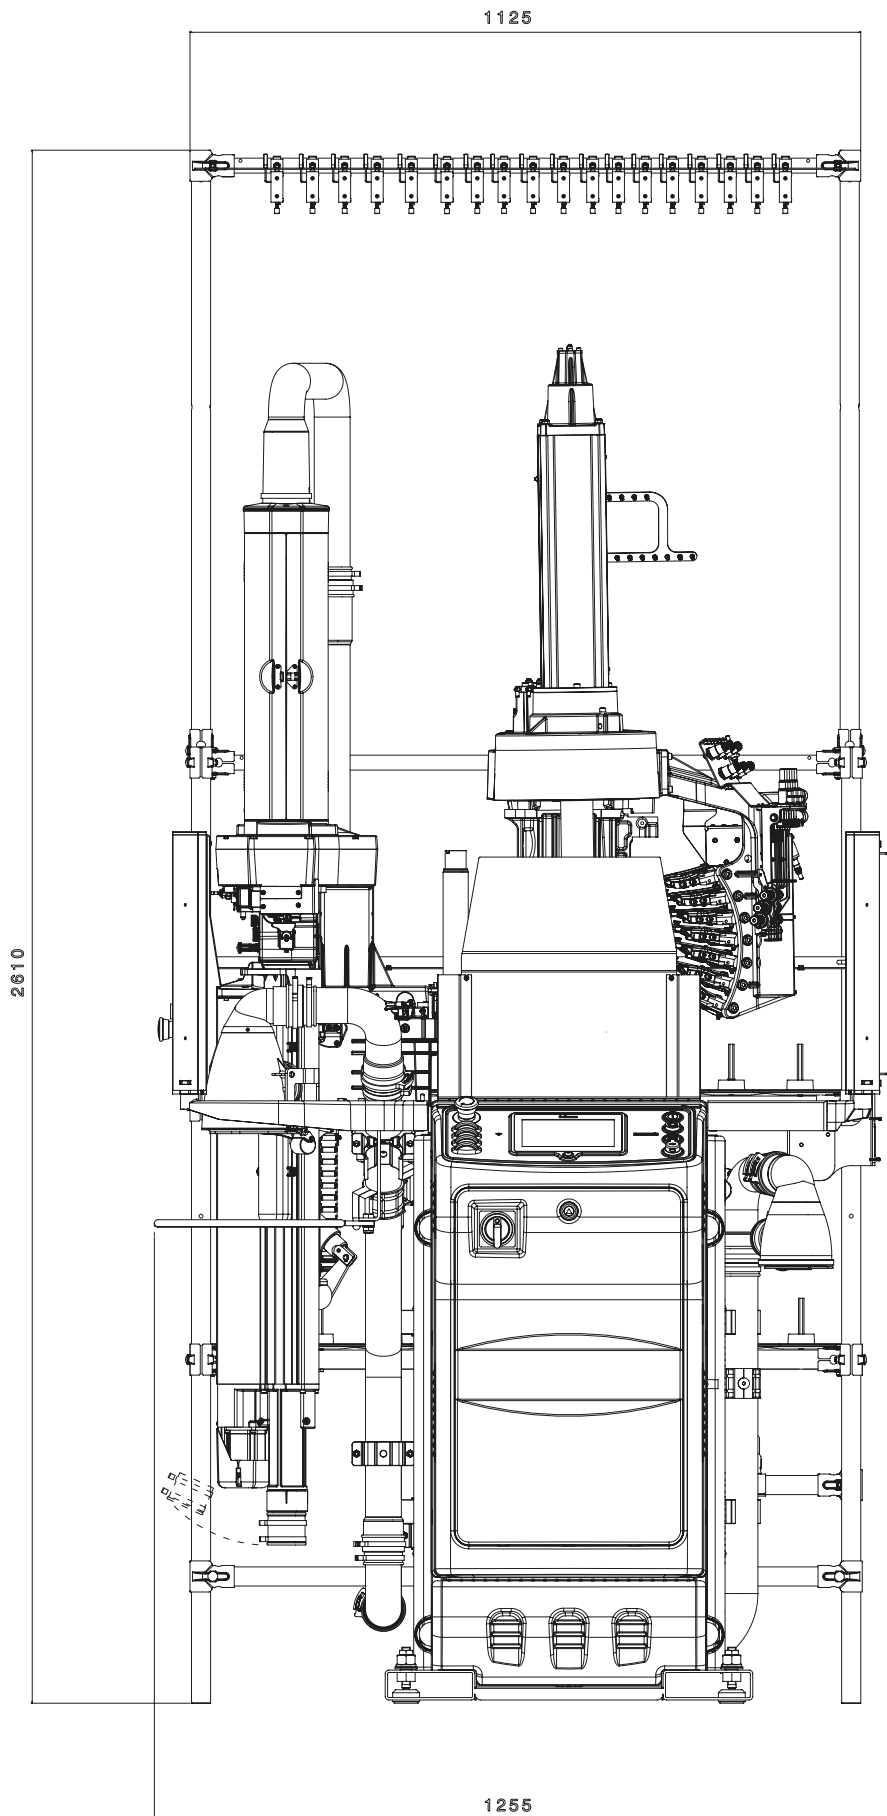


FRONT VIEW

Machine dimensions + 18 positions yarn creel.

NOTE:

The picture may show fittings and equipment that are supplied on demand and not.

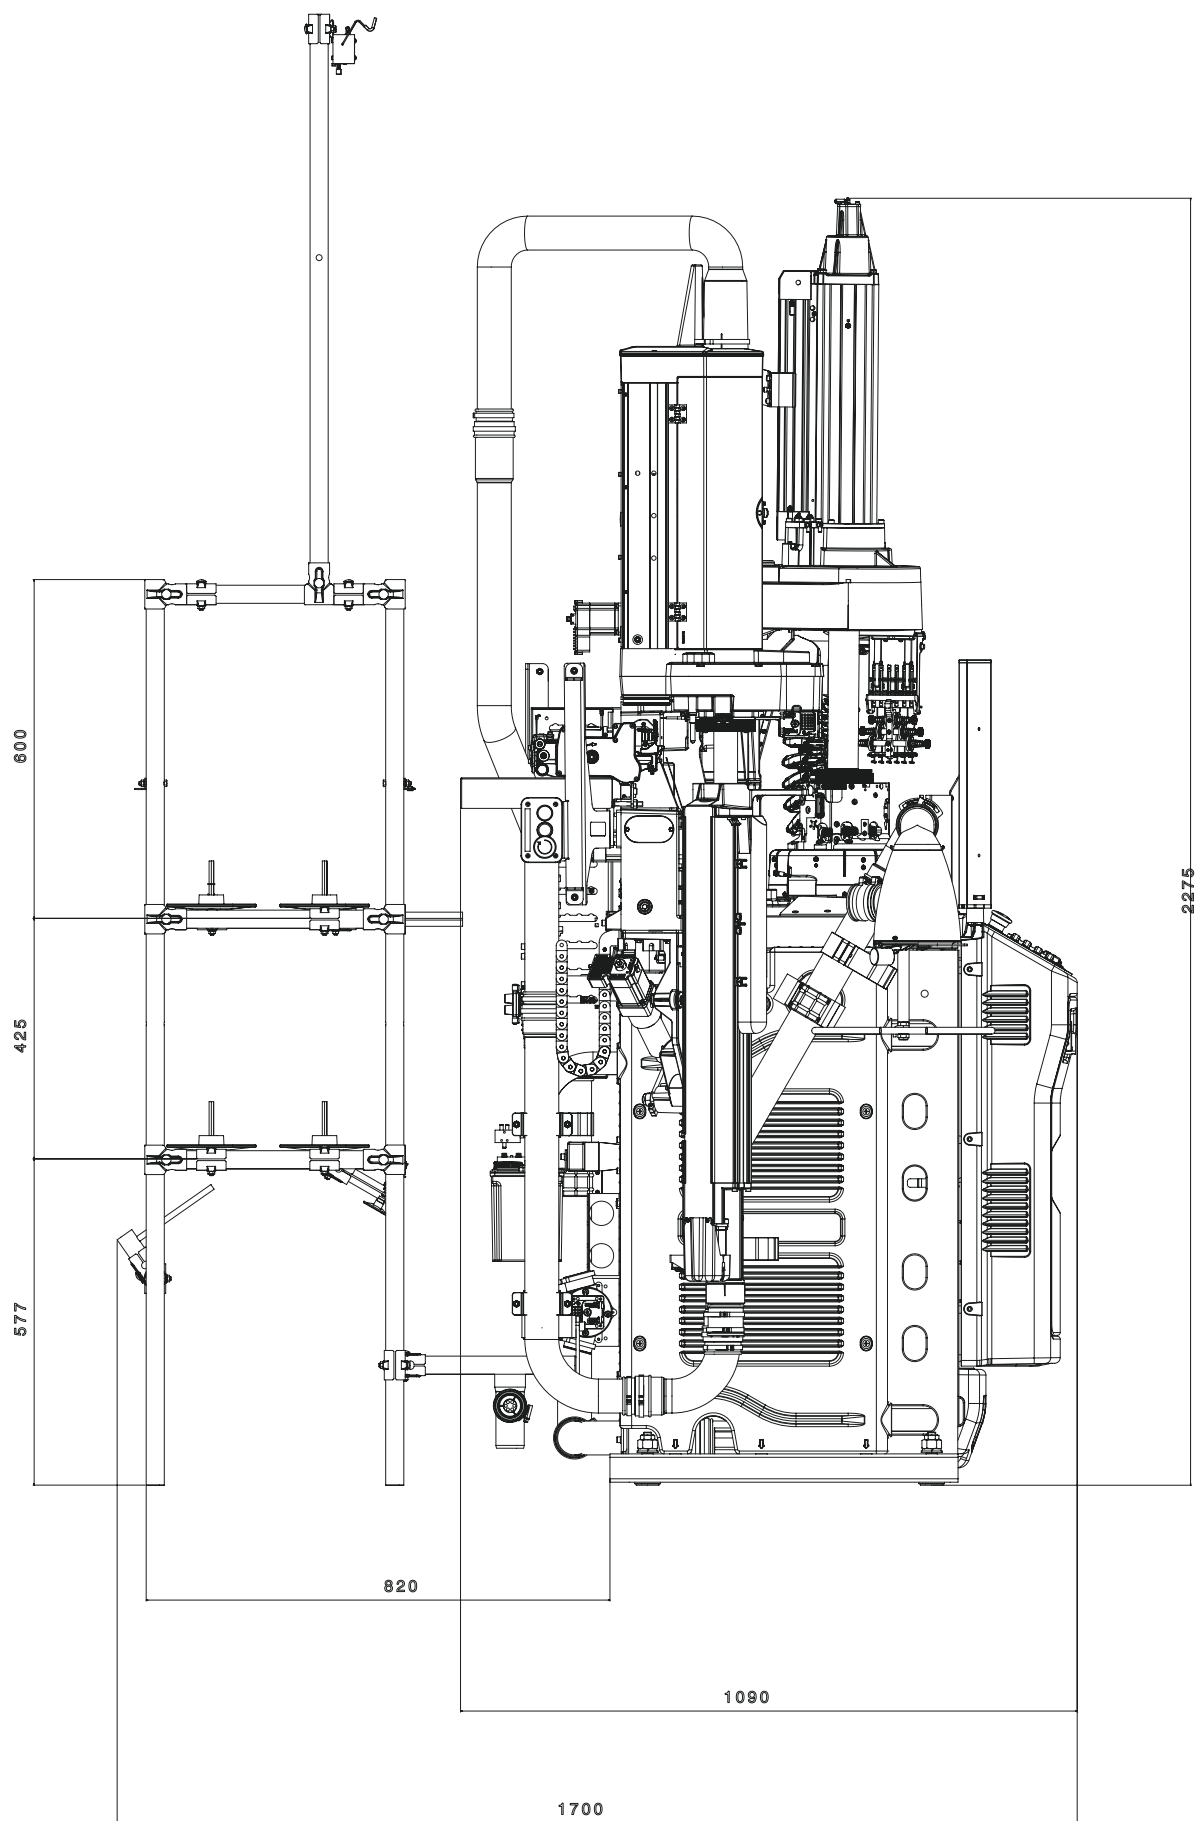

SIDE VIEW

Machine dimensions + 18 positions yarn creel.

NOTE:

The picture may show fittings and equipment that are supplied on demand and not.

NOTE

E133HX - E143HX - E153HX

NOTE

E133HX - E143HX - E153HX





LONATI SPA

Via Francesco Lonati, 3 | 25124 Brescia (Italy)
Tel. +39 030 23901 | Fax +39 030 2310024
C.F.: 01469680175 | P.iva: 02096730961
info@lonati.com - www.lonati.com